

Resinoid Wheels (Non-Reinforced)



Resinoid Wheels (Non-Reinforced)

Resinoid Wheels (Non-Reinforced)

For use where EXTRA strength is NOT required. These wheels offer the lowest cost and most efficient cutting performance where the work is firmly clamped, and the wheel is restricted to motion in one plane.

SAFETY FIRST

Always wear protective clothing, safety glasses and a face shield, as well as a dust mask or respirator when grinding and cutting.

Available for: Ferrous and Non-Ferrous Metals, Masonry, and Special Applications.

WARNING




- Wear approved eye protection & respirator!
- Do not use without all guards in place!
- Speed not to exceed marked RPM!
- Read Safety Pamphlet in box!

Gulf States manufactures specialty sizes and specifications to meet your needs.

Diameter	Thickness	Arbor Size	Std. Rec. RPM
2"	3/8, 1/2, 3/4, 1	3/8, 1/2, 5/8	18,100 *
2 1/2"	3/8, 1/2, 3/4, 1	3/8, 1/2, 5/8	14,500 *
3"	3/8, 1/2, 3/4, 1	3/8, 1/2, 5/8	12,000 *
4"	1/2, 3/4, 1	3/8, 1/2, 5/8	9,000 *
5"	1/2, 3/4, 1	1/2, 5/8	7,200 *
6"	5/8, 3/4, 1, 1 1/4	5/8, 3/4, 1, 1 1/4	6,000 *
8"	1/2, 3/4, 1	5/8, 3/4, 1, 1 1/4	4,500 *
10"	1/2, 3/4, 1, 2, 3,	1 1/2, 1 1/4	3,600 *
12"	1, 1 1/2, 2, 2 1/2	1 1/4, 2, 3, 3 1/2	3,000 *
14"	1, 1 1/2, 2, 2 1/2	1 1/4, 2, 3, 3 1/2	2,600 *
16"	1, 1 1/2, 3	1, 1 1/4, 6	2,270 *
18"	1, 1 1/2, 3	1, 1 1/4, 3 1/2, 6	2,010 *

***NOTE:** RPMs may vary on diameter, thickness and specifications of Non-Reinforced Resinoid Wheel.

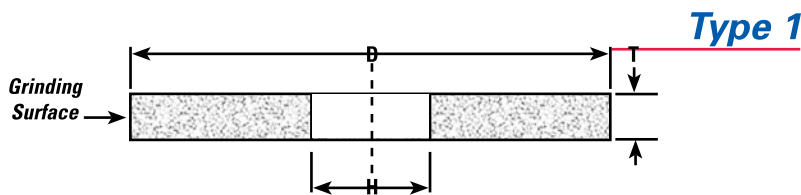

Type 1 Straight Wheel
Peripheral Grinding Wheel having a diameter, thickness and hole.

