

# Depressed Center Wheels



*General Purpose*



*Long-Life*



*Pipe Blazer*



*Stain Blitz*



*Advantage*



*Waffle*



*Super Cut*



*\*Specialty*

## Type 27

Type 27 & 28 Depressed Center Wheels are available with either 7/8" conventional arbor holes or 5/8"-11 threaded arbor Quick-Spin type as an integral part of the wheel.

## Type 28

The wide flat area of contact serves as a guide to prevent digging into flat surfaces. The Saucer Type 28 is a faster weld cut grinding wheel.



### WARNING



- Wear approved eye protection & respirator!
- Do not use without all guards in place!
- Speed not to exceed marked RPM!
- Read Safety Pamphlet in box!

**Gulf States manufactures specialty sizes and specifications to meet your needs.**

Diameter x Thickness	Arbor Size	Adaptors	Rec. & Max RPM
3 X 1/4	3/8, 5/8	N/A	20,400
4 X 1/8	3/8, 7/8	N/A	15,300
4 X 1/4	3/8, 7/8	N/A	15,300
4 1/2 X 1/16	5/8, 7/8	5/8 - 11	13,300
4 1/2 X 1/8	5/8, 7/8	5/8 - 11	13,300
4 1/2 X 1/4	5/8, 7/8	5/8 - 11	13,300
5 X 1/8	7/8	5/8 - 11	12,200
5 X 1/4	7/8	5/8 - 11	12,200
6 X 1/8	7/8	5/8 - 11	10,200
6 X 1/4	7/8	5/8 - 11	10,200
7 X 1/16	7/8	5/8 - 11	8,500
7 X 1/8	7/8	5/8 - 11	8,500
7 X 1/4	7/8	5/8 - 11	8,500
7 X 3/8	7/8	5/8 - 11	8,500
7 X 1/2	7/8	5/8 - 11	6,000
7 X 1	7/8	5/8 - 11	6,000
9 X 1/16	7/8	5/8 - 11	6,000
9 X 1/8	7/8	5/8 - 11	6,000
9 X 1/4	7/8	5/8 - 11	6,000
9 X 3/8	7/8	5/8 - 11	6,000
9 X 1/2	7/8	5/8 - 11	6,000

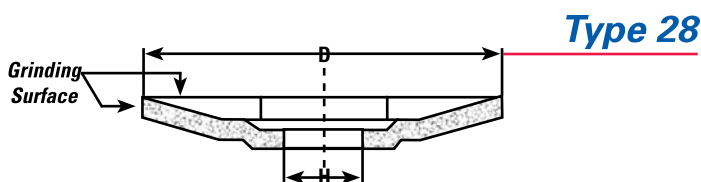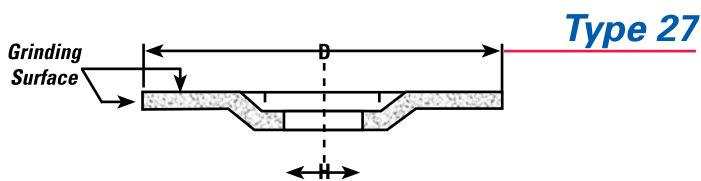

*Type 27 and 28 – Wheels, depressed center.  
Wheels are generally used on right angle portable grinders.*

